


CTF and TF

CTF and TF lighting towers are the most basic products of the Tower Light range. The products are extremely practical and easy to be used, ensuring a good level of illumination for small to medium sized areas. The CTF variants of 5.5, 7, and 9 meters are ideal for applications in containers, mobile offices, dormitories and mobile generators. The 5,3 meters CTF is suitable for application on road trailer. All these models are also perfect for civil protection use.

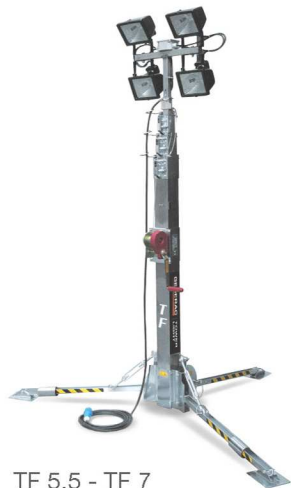

TF 5,5 - TF 7

Technical data	TF 5,5	TF 7
Lifting System	Manual	Manual
Min. Dim. (cm)	35 x 40 x 190	35 x 40 x 235
Max. Dim. (cm)	184 x 150 x 550	202 x 150 x 700
Dry Weight (kg)	64	75
Lamps Power	4 x 500 W	2 x 1500 W
Lamps Type	Halogen	Halogen
Illuminated Area (5 lux min.)	625 sq.m	1200 sq.m
Lumen	44000	66000
Mast Rotation	No	No
Inlet plug	16 A - 230 V	16 A - 230 V
Main options available	No	



CTF 5,5 - CTF 7 - CTF 9

Technical data	CTF 5,5	CTF 7	CTF 9
Lifting System	Manual	Manual	Manual
Min. Dim. (cm)	260 x 280 x 1900	280 x 280 x 2380	280 x 280 x 2500
Max. Dim. (cm)	305 x 545 x 5500	350 x 1060 x 7000	350 x 1060 x 9000
Dry Weight (kg)	67	85	93
Lamps Power	4 x 500 W	4 x 1000 W	4 x 1500 W
Lamps Type	Halogen	Halogen	Halogen
Illuminated Area (5 lux min.)	625 sq.m	1500 sq.m	2000 sq.m
Lumen	44000	88000	132000
Mast Rotation	360°	360°	360°
Inlet Plug	16 A - 230 V	32 A - 380 V	32 A - 380 V
Main options available	No		



CTF 5,3-L - CTF 5,3-MH

Technical data	CTF 5,3-L	CTF 5,3-MH
Lifting System	Manual	Manual
Min. Dim. (cm)	123 x 48 x 204	117 x 42 x 170
Max. Dim. (cm)	123 x 48 x 530	117 x 42 x 530
Dry Weight (kg)	145 kg	135 kg
Lamps Power	4 x 150 W	4 x 400 W
Lamps Type	LED	Metal Halide
Illuminated Area (5 lux min.)	1500 sq.m	1600 sq.m
Lumen	61000	144000
Mast Rotation	360°	360°
Inlet plug	16 A - 230 V	16 A - 230 V
Main options available	No	